
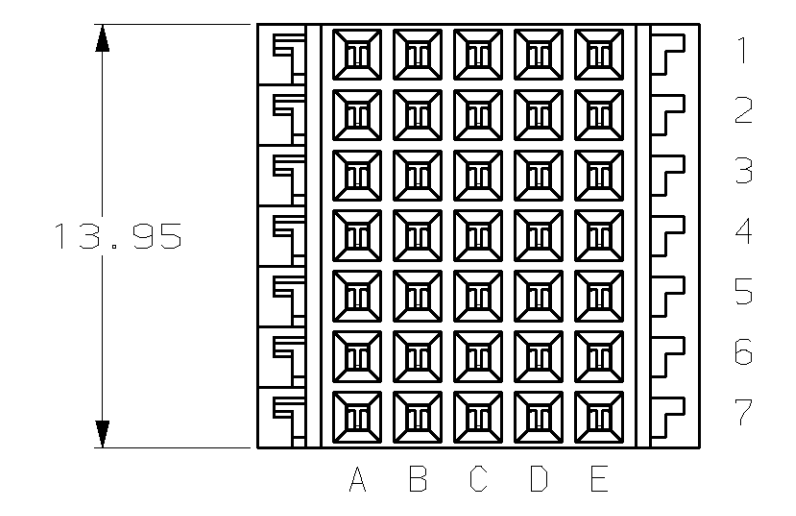
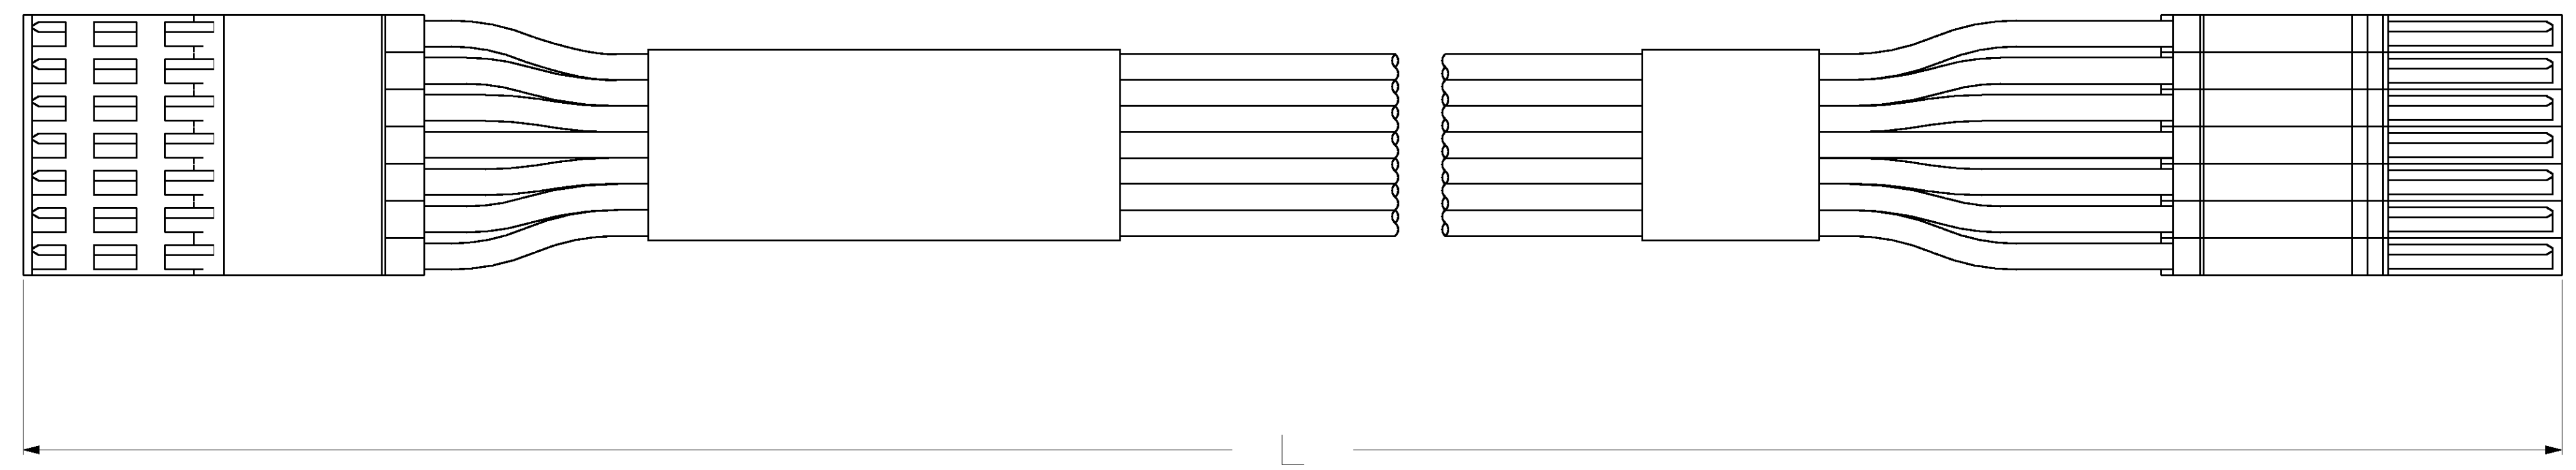
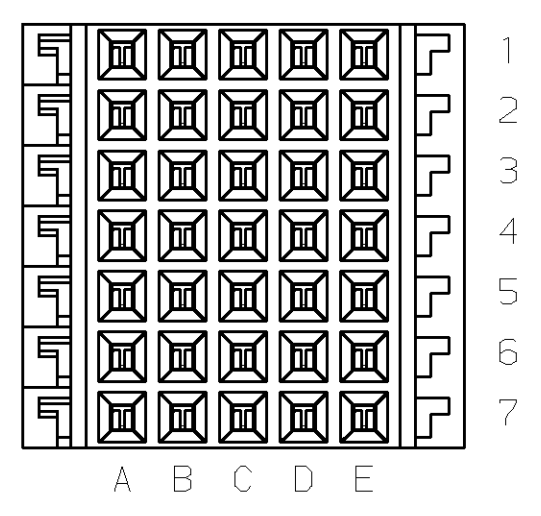


LOC	DIST	REVISIONS			
CF	39	REV	DATE	OWN	APVD
		0	RELEASE -1 THRU -6	8-8-96	TS GG
		A	REV PER 0820-0909-96	10-11-96	TS GG
		B	REV PER 0520-0262-02	14MAY02	TS CA

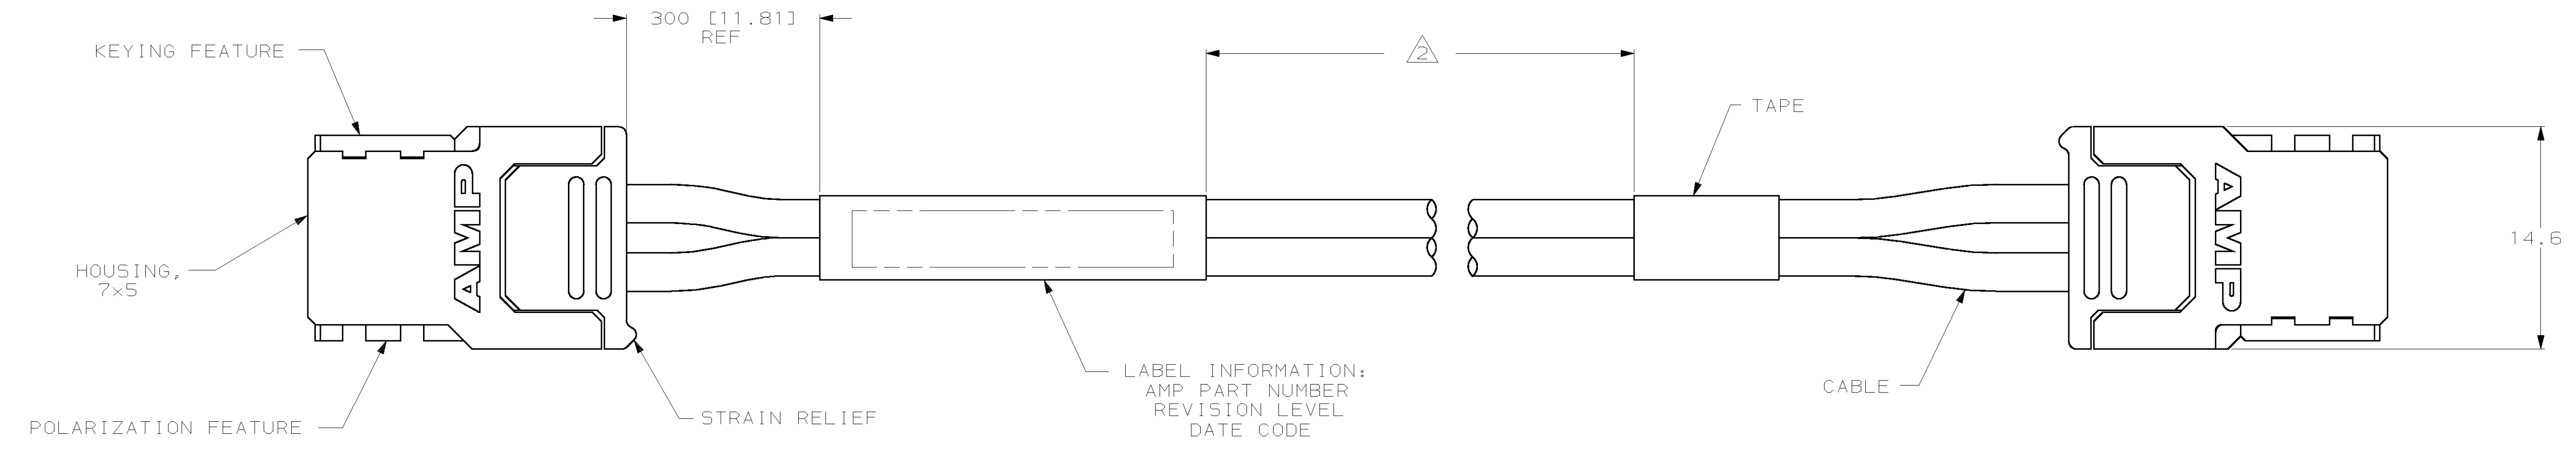

WIRING DIAGRAM

- 1. EACH HOUSING CONTAINS 5 SOCKET CONTACTS. CONTACTS ARE PLATED WITH .00038 MIN THICK GOLD OVER .00127 MIN THICK NICKEL.
- 2. ADDITIONAL TIE TAPE PLACED ON CABLE BUNDLE, SPACED EVERY 600 mm MAX.
- 3. MAXIMUM ALLOWABLE MATING POST LENGTH 8.5mm
- 4. CABLE : SIGNAL & DRAINS 28 AWG
 PROPAGATION DELAY 4.265 NS/METER NOM
 IMPEDANCE 100 OHMS DIFFERENTIAL NOM
 SHIELD ALUMINIZED MYLAR
 JACKET PVC - UL RECOGNITION

10000±125 [393.70±4.92]	636207-6
5000±75 [196.85±2.95]	636207-5
3000±50 [118.11±1.97]	636207-4
2000±25 [78.74±.98]	636207-3
1500±20 [59.06±.79]	636207-2
1000±13 [39.37±.51]	636207-1
L	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SMITH 8-8-96	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCHES)		CHK G. GUTGOLD 8-8-96	AMP	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. SMITH 8-8-96	NAME CABLE ASSY, 7x5, 100 OHM, 2mm HM	
0 PLC ±0.13(.005)		PRODUCT SPEC		
1 PLC ±0.13(.005)		APPLICATION SPEC		
2 PLC ±0.13(.005)		SIZE A1		
3 PLC ±0.13(.005)		CAGE CODE 00779		
4 PLC ±0.13(.005)		DRAWING NO 636207		
ANGLES 4°		WEIGHT		
FINISH		CUSTOMER DRAWING		
		SCALE 4:1 SHEET 1 OF 1 REV B		