


REV. 0
DCO 17633

COIL: @ 25°C	
RESISTANCE	200 OHMS ± 10%
NOMINAL VOLTAGE	12.6 VDC
MUST OPERATE	6.8 VDC
MUST RELEASE	0.74 VDC

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 20 g's
SHOCK	100 g's 6±1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

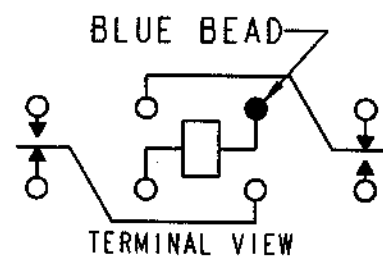

CONTACT RATING:	5 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. ASB 3 OCT 02 CK. *8103/02*

CII Technologies
advanced control electronic solutions

CUST. CII STD
CUST. NO. _____ REV. _____

"FW" RELAY

FW5A1220D00